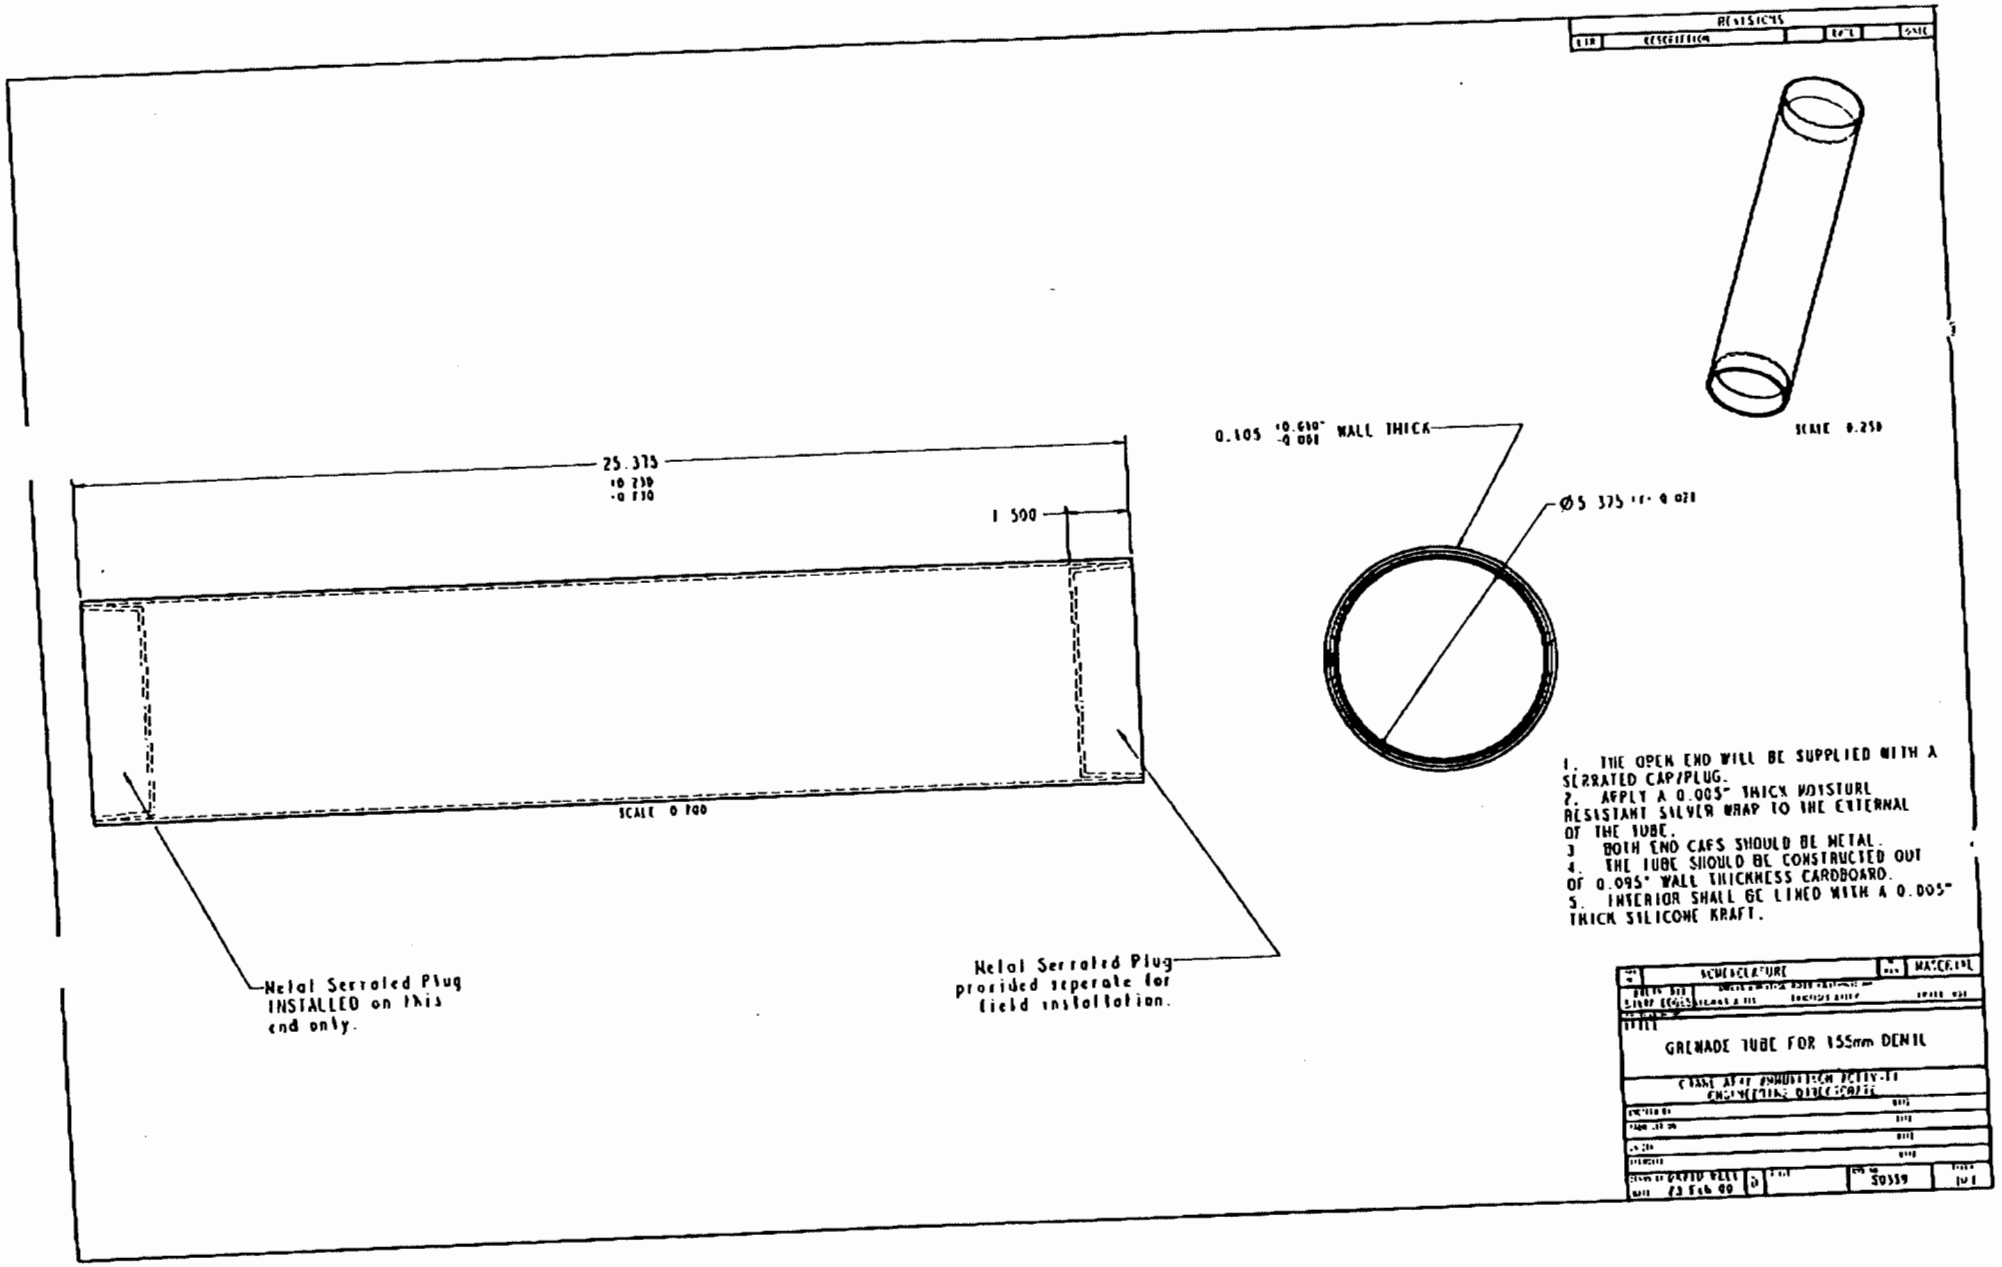
REVISIONS
25.375
1.500
SCALE 0.700
Metal Serrated Plug INSTALLED on this end only.
Metal Serrated Plug provided seperate for field installation.
0.105 WALL THICK
Ø5.375
SCALE 0.250
1. THE OPEN END WILL BE SUPPLIED WITH A SERRATED CAP/PLUG.
2. APPLY A 0.005" THICK MOISTURE RESISTANT SILVER WRAP TO THE EXTERNAL OF THE TUBE.
3. BOTH END CAPS SHOULD BE METAL.
4. THE TUBE SHOULD BE CONSTRUCTED OUT OF 0.095" WALL THICKNESS CARDBOARD.
5. INTERIOR SHALL BE LINED WITH A 0.005" THICK SILICONE KRAFT.
NOMENCLATURE
MATERIAL
GRENADE TUBE FOR 155mm DENIL
CRANE AREA ANNUNCIATION ACTIVITY
ENGINEERING DIRECTORATE
23 Feb 00
50359